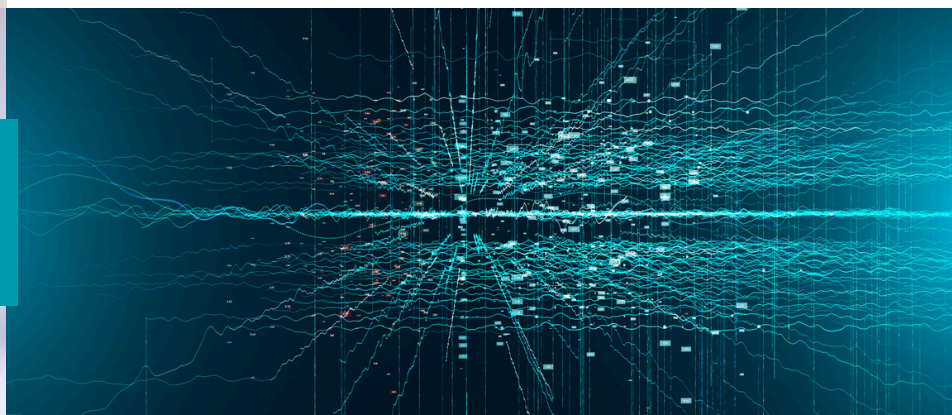# ANYWHERE COMMERCE

AC PINpad
DATA SHEET

Product Name:
AC PINpad

Product Category:
Payment Terminal

PRODUCT OVERVIEW

Introducing the AC Pinpad: the ultimate compact POS device for modern businesses. Equipped with a 2" color display, NFC, and Smart Card Reader (SCR) interfaces, it delivers secure and seamless payment processing. With advanced connectivity options, including BLE, 4G, or WiFi, and a long-lasting battery, the AC Pinpad ensures efficiency and reliability for on-the-go transactions.

KEY FEATURES

Advanced Payment Interfaces
Supports NFC & Contactless Smart Card Reader (SCR) for secure and versatile payment acceptance, including contactless options like VISA payWave and MasterCard PayPass.

Reliable Connectivity Options
Offers BLE, 4G, and WiFi connectivity to ensure smooth and uninterrupted operations in any setting.

Long Lasting Battery Design
Powered by a rechargeable Li-Po battery, it delivers extended usage, perfect for businesses on the go.

ANYWHERE COMMERCE

SPECIFICATIONS:
AC PINpad

CONTACT US

Address: 1100 W Shaw Ave #122
Fresno, CA 93711

E-mail:

sales@anywherecommerce.com

www.anywherecommerce.com

CPU:	Secure ARM Cortex M3
Buttons:	On/Off button, 10 numeric buttons, 2 function buttons
Display:	320 x 240 px 2-Inch Color TFT
Magnetic Card Reader:	Triple track bi-directional
Smart Card Reader:	Friction type
Contactless Reader:	NFC-A, ISO 14443 Type A NFC-B, ISO 14443 Type B NFC-F, Felica NFC-V, ISO 15693
Contactless Payments:	VISA payWave MasterCard PayPass American Express DPAS (Discover)
Connectors:	Contact pins USB Type-C port nanoSIM slot (optional)
Wired Communication:	USB (device)
OS Compatibility:	iOS, Android, Windows
Bluetooth:	BT version 4.2 Low Energy
Wireless (optional):	Wi-Fi IEEE 802.11 b/g/n
Cellular Module (optional):	2G/4G communication
LED Indication:	Contactless payment status
Audio Features:	Electromagnetic buzzer
Power Supply:	DC 5 V through USBDC 5 V through contact pins
Battery:	Rechargeable Li-Po Battery3.7 V, 620 mAh
Reliability:	500,000 chip card cycles 1,000,000 button clicks
Certificates:	CE, FCC, PCI PTS 6.x, EMV Level 1, EMV Level 2, EMV Level 1 Contactless, TQM
Dimension W x D x H:	69 x 121 x 16 mm
Weight:	138 g
Operational Temperature:	-10 °C to 40 °C / 5 to 90% RH
Storage temperature:	-15 °C to 50 °C / 5 to 90% RH
Drop Tested:	1.2 m, faces and edges
Other Box Contents:	USB Type-A to USB Type-C cable

ANYWHERE COMMERCE